FABCON

PRODUCT SPECIFICATIONS

VersaCore Pro™

We offer solutions for your unique requirements, from corporate headquarters to grocery stores, manufacturing facilities to ice arenas, and car dealerships to data centers and more.

PRODUCT NAME	OPTION	R-VALUE
10" VersaCore Pro	+ 6" Billet w/4.5" Drop-In	**14.5**
12" VersaCore Pro	+ 8" Billet w/4.5" Drop-In	**17.9**
VersaCore Pro Sandwich	+ 2” of Continuous Insulation + 4.5" Billet w/3" Drop-In	**23.6**


10" VC Pro	UNIT WEIGHT (PSF)	CLIMATE ZONE*	R-VALUE	U-VALUE	FIRE RATING (HRS)	HEAT CAPACITY (BTU/FT^2*F)	SOUND TRANSMISSION CLASS (STC)
VC Pro + 6" Billet w/4.5" Drop-In	62	Zone 1-7	14.5	0.069	2.3	12.2	51.0
12" VC Pro	**UNIT WEIGHT (PSF)**	**CLIMATE ZONE***	**R-VALUE**	**U-VALUE**	**FIRE RATING (HRS)**	**HEAT CAPACITY (BTU/FT^2*F)**	**SOUND TRANSMISSION CLASS (STC)**
VC Pro + 8" Billet w/6.5" Drop-In	66	Zone 1-7	17.9	0.056	2.5	12.8	51.4
VC Pro Sandwich	**UNIT WEIGHT (PSF)**	**CLIMATE ZONE***	**R-VALUE**	**U-VALUE**	**FIRE RATING (HRS)**	**HEAT CAPACITY (BTU/FT^2*F)**	**SOUND TRANSMISSION CLASS (STC)**
VC Pro Sandwich + 2” of Continuous Insulation + 4.5" Billet w/3" Drop-In	78	Zone 1-7	23.6	0.042	4.8	15.5	53.0

*Climate zones determined using the U-factor method for above grade mass walls per 2021 IECC Table C402.1.4 and 2024 IECC Table C402.1.2.

**Higher fire ratings are available by reducing the insulation thickness. Please consult your Fabcon sales representitive.


10" VersaCore Pro

6" Billet w/4.5" Drop-In

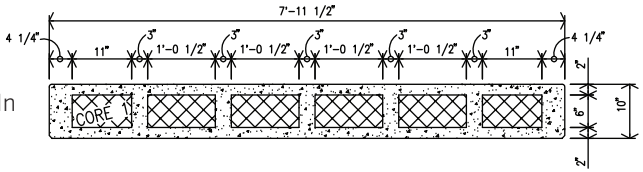

12" VersaCore Pro

8" Billet w/6.5" Drop-In

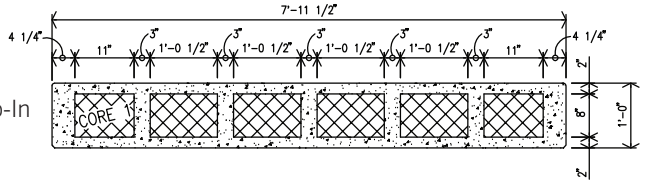

VersaCore Pro Sandwich

4.5" Billet w/3" Drop-In

